

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-D
 Contacts: Copper Alloy
 Shell: Steel
 Rivet,Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u"~150u" Nickel
 Contact Area: 1u" Gold
 Solder Tails Area: 100u" Tin Min.


ELECTRICAL

Current Rating: 1A Max.
 Contact Resistance: 30 mΩ Max.
 Insulation Resistance: 3000 MΩ Min. @500V DC
 Dielectric Withstanding Voltage: 500V AC/mlnute
 Temperature Range: -55°C to +105°C

PART NO.

702 A F 068 F S G 0 A 3
 1 2 3 4 5 6 7 8 9 10

- | | |
|-------------------------|---------------------|
| 1.SERIES NO. | 8.PROCESS OPTION: |
| 2.TYPE: A=Standard | 0=Non Function |
| 3.GREEN OPTION: | 9.PARTS OPTION: |
| F=RoHS | A=2#56 W/ Hook |
| 4.CONTACT NUMBER | E=2#56 W/O Hook |
| 050 D68 | 10.INSULATOR COLOR: |
| 5.CONTACT TYPE: | 3=Black |
| F=Female | |
| 6.CONTACT AREA PLATING: | |
| S=Selective Gold 1u" | |
| 7.SHELL OPTION: | |
| G=Front Shell | |

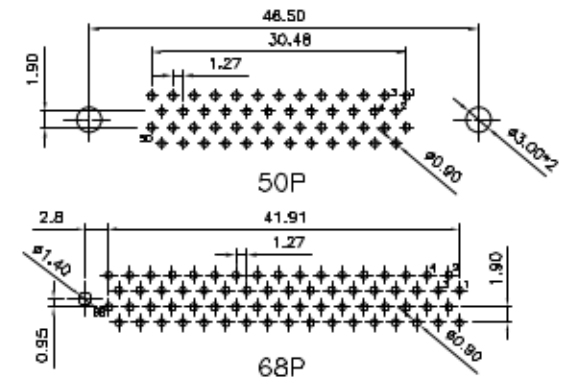

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE: AS SHOWN	UNIT: mm		
DRAWN	11/01/14	DRAWN NAME: SCSI II PIN TYPE PCB STRAIGHT TYPE	
CHECKED	/ /	PRODUCT NO. 702AF068FSG0A3	
APPROVED	/ /	FILE NAME: 702AF068FSG0A3	
SIZE	A4	REV.	X1

REV.	DESCRIPTION	DATE