R-307 (B00)

Standard: IEC 60320 C6
Rating: 2.5A 250V AC
Insulation Resistance: 100MΩ 500V DC/1 minute
Dielectric Strength: 2000V AC/1 minute
Housing Material: Thermoplastic 94V-2~V-0
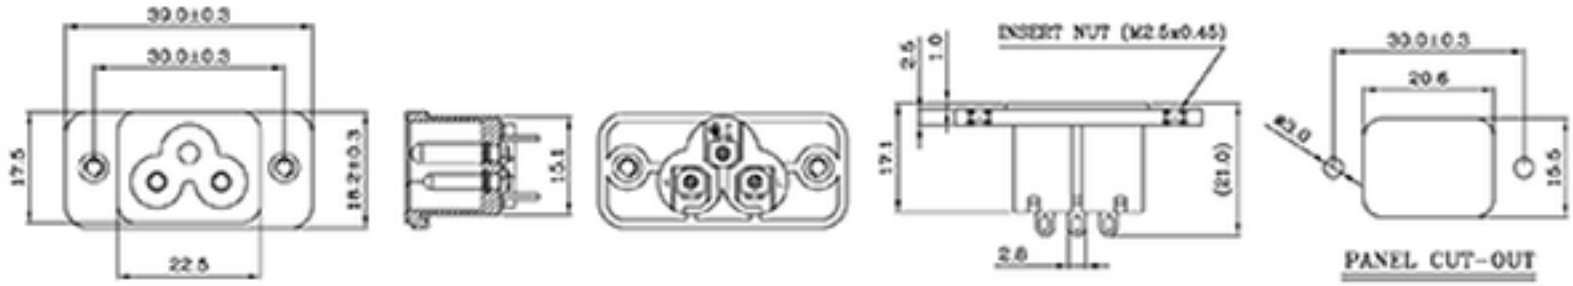
Dimensions